


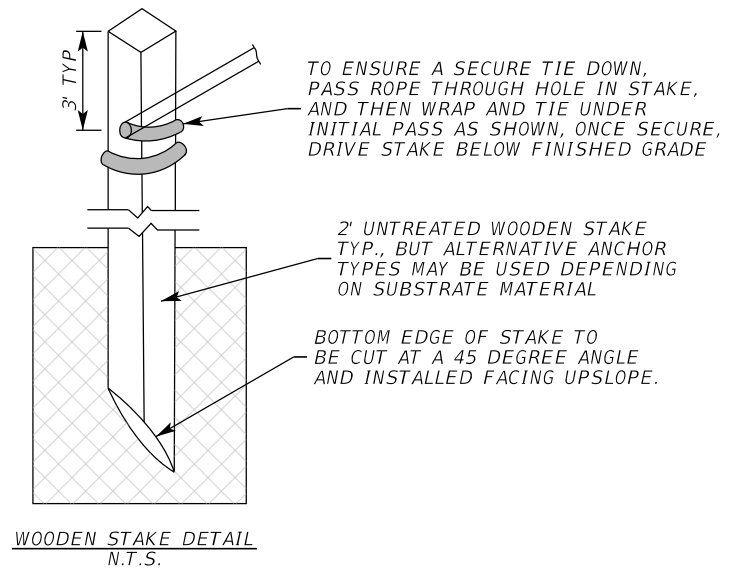


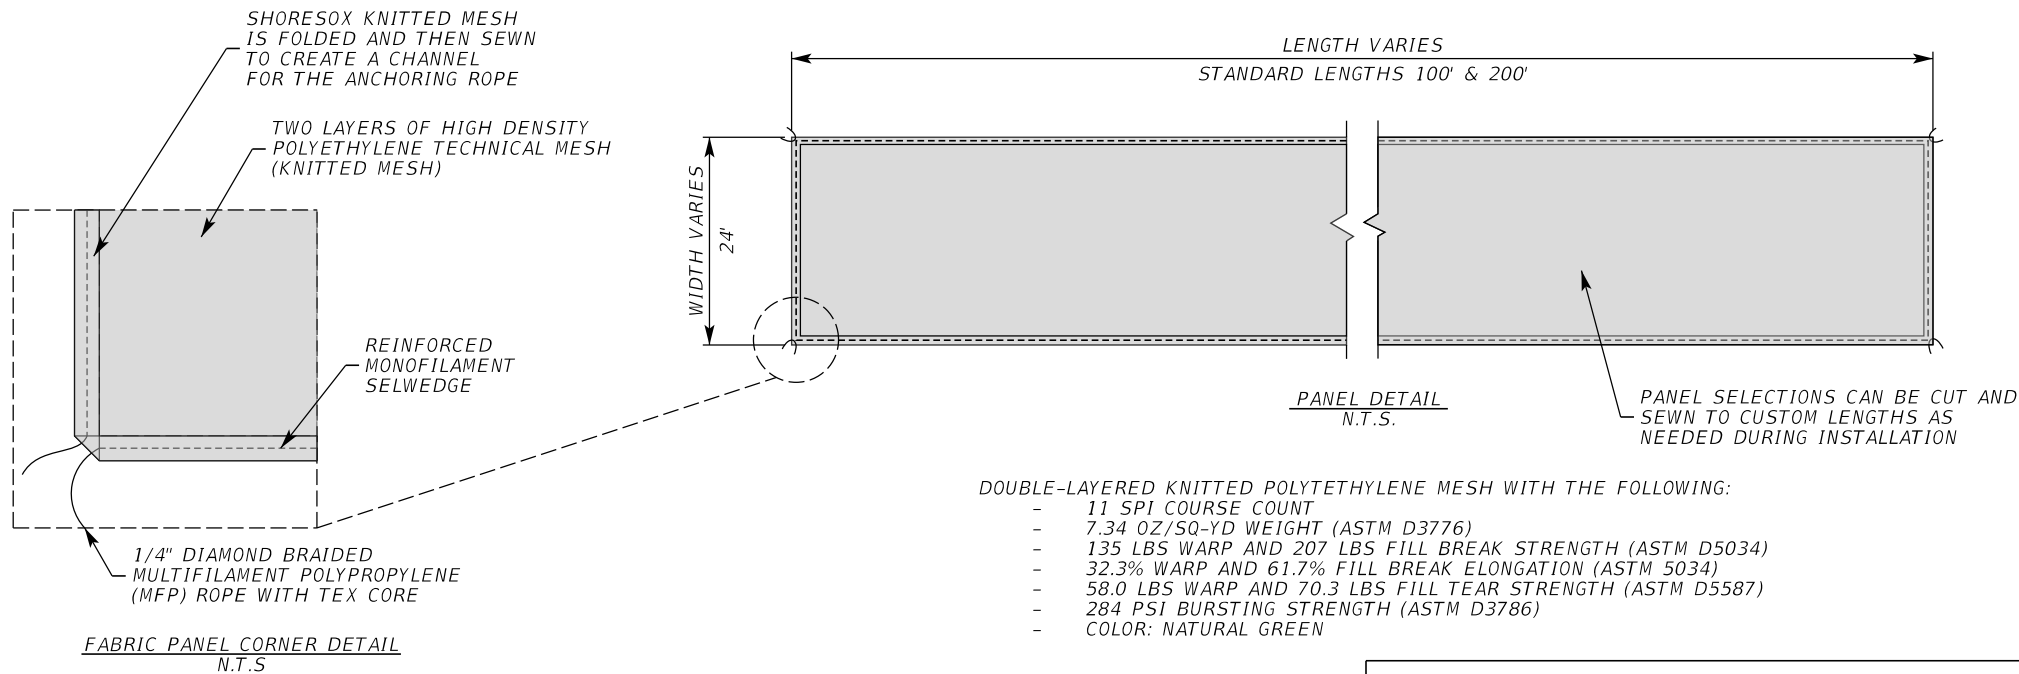

- DOUBLE-LAYERED KNITTED POLYTETHYLENE MESH WITH THE FOLLOWING:
- 11 SPI COURSE COUNT
 - 7.34 OZ/SQ-YD WEIGHT (ASTM D3776)
 - 135 LBS WARP AND 207 LBS FILL BREAK STRENGTH (ASTM D5034)
 - 32.3% WARP AND 61.7% FILL BREAK ELONGATION (ASTM 5034)
 - 58.0 LBS WARP AND 70.3 LBS FILL TEAR STRENGTH (ASTM D5587)
 - 284 PSI BURSTING STRENGTH (ASTM D3786)
 - COLOR: NATURAL GREEN

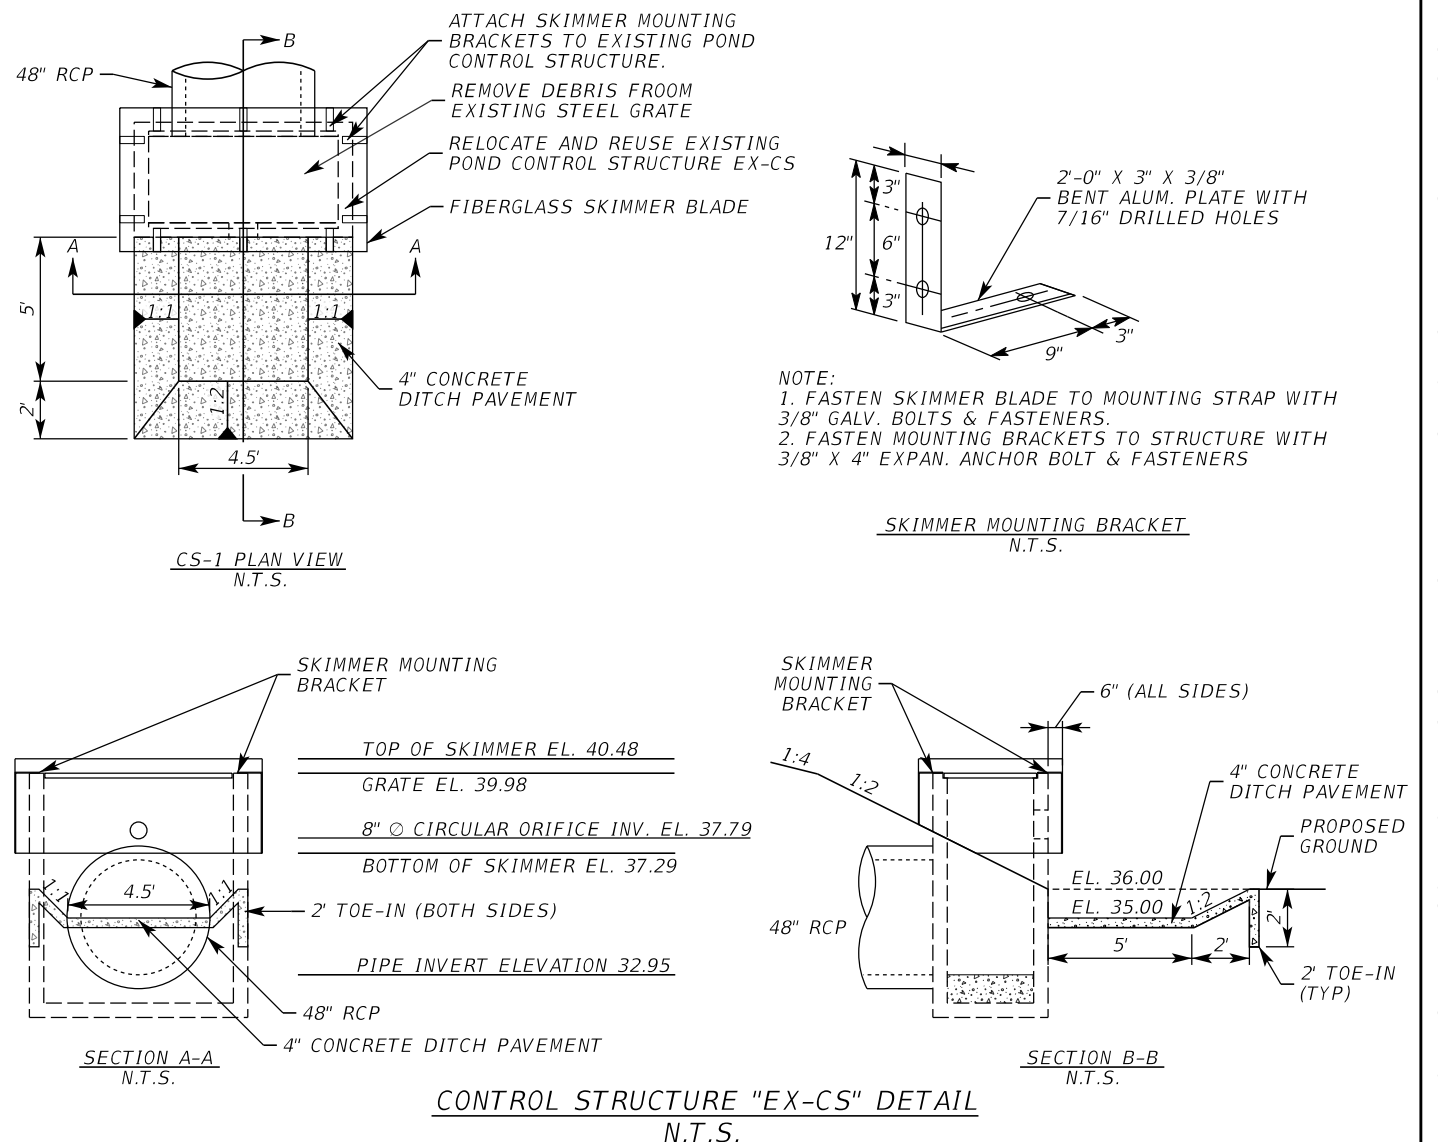

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

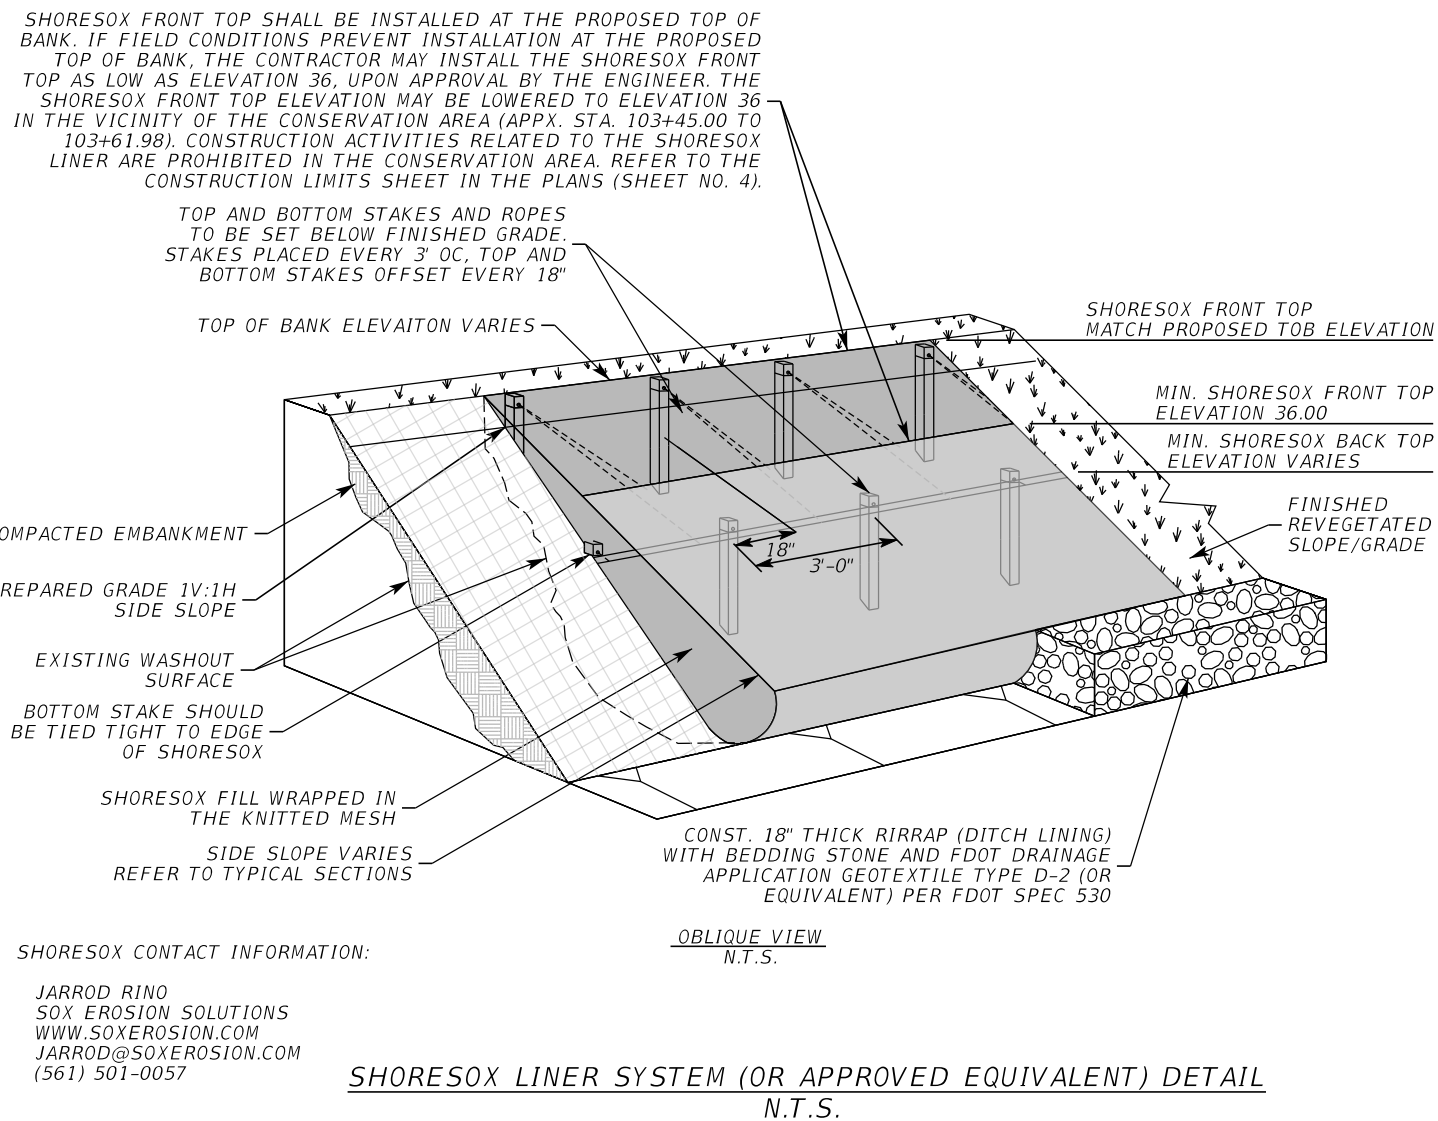

Steven M. Sommerfeldt, PE 3000 Dovera Drive, Suite 200
PE No. 64074 Oviedo, Florida 32765
Certificate of Authorization No. 7074 p 407.971.8850






City of Oviedo
ENGINEERING DIVISION

**INTERIM REPAIR
DETAIL SHEET**

SHEET
NO.

8

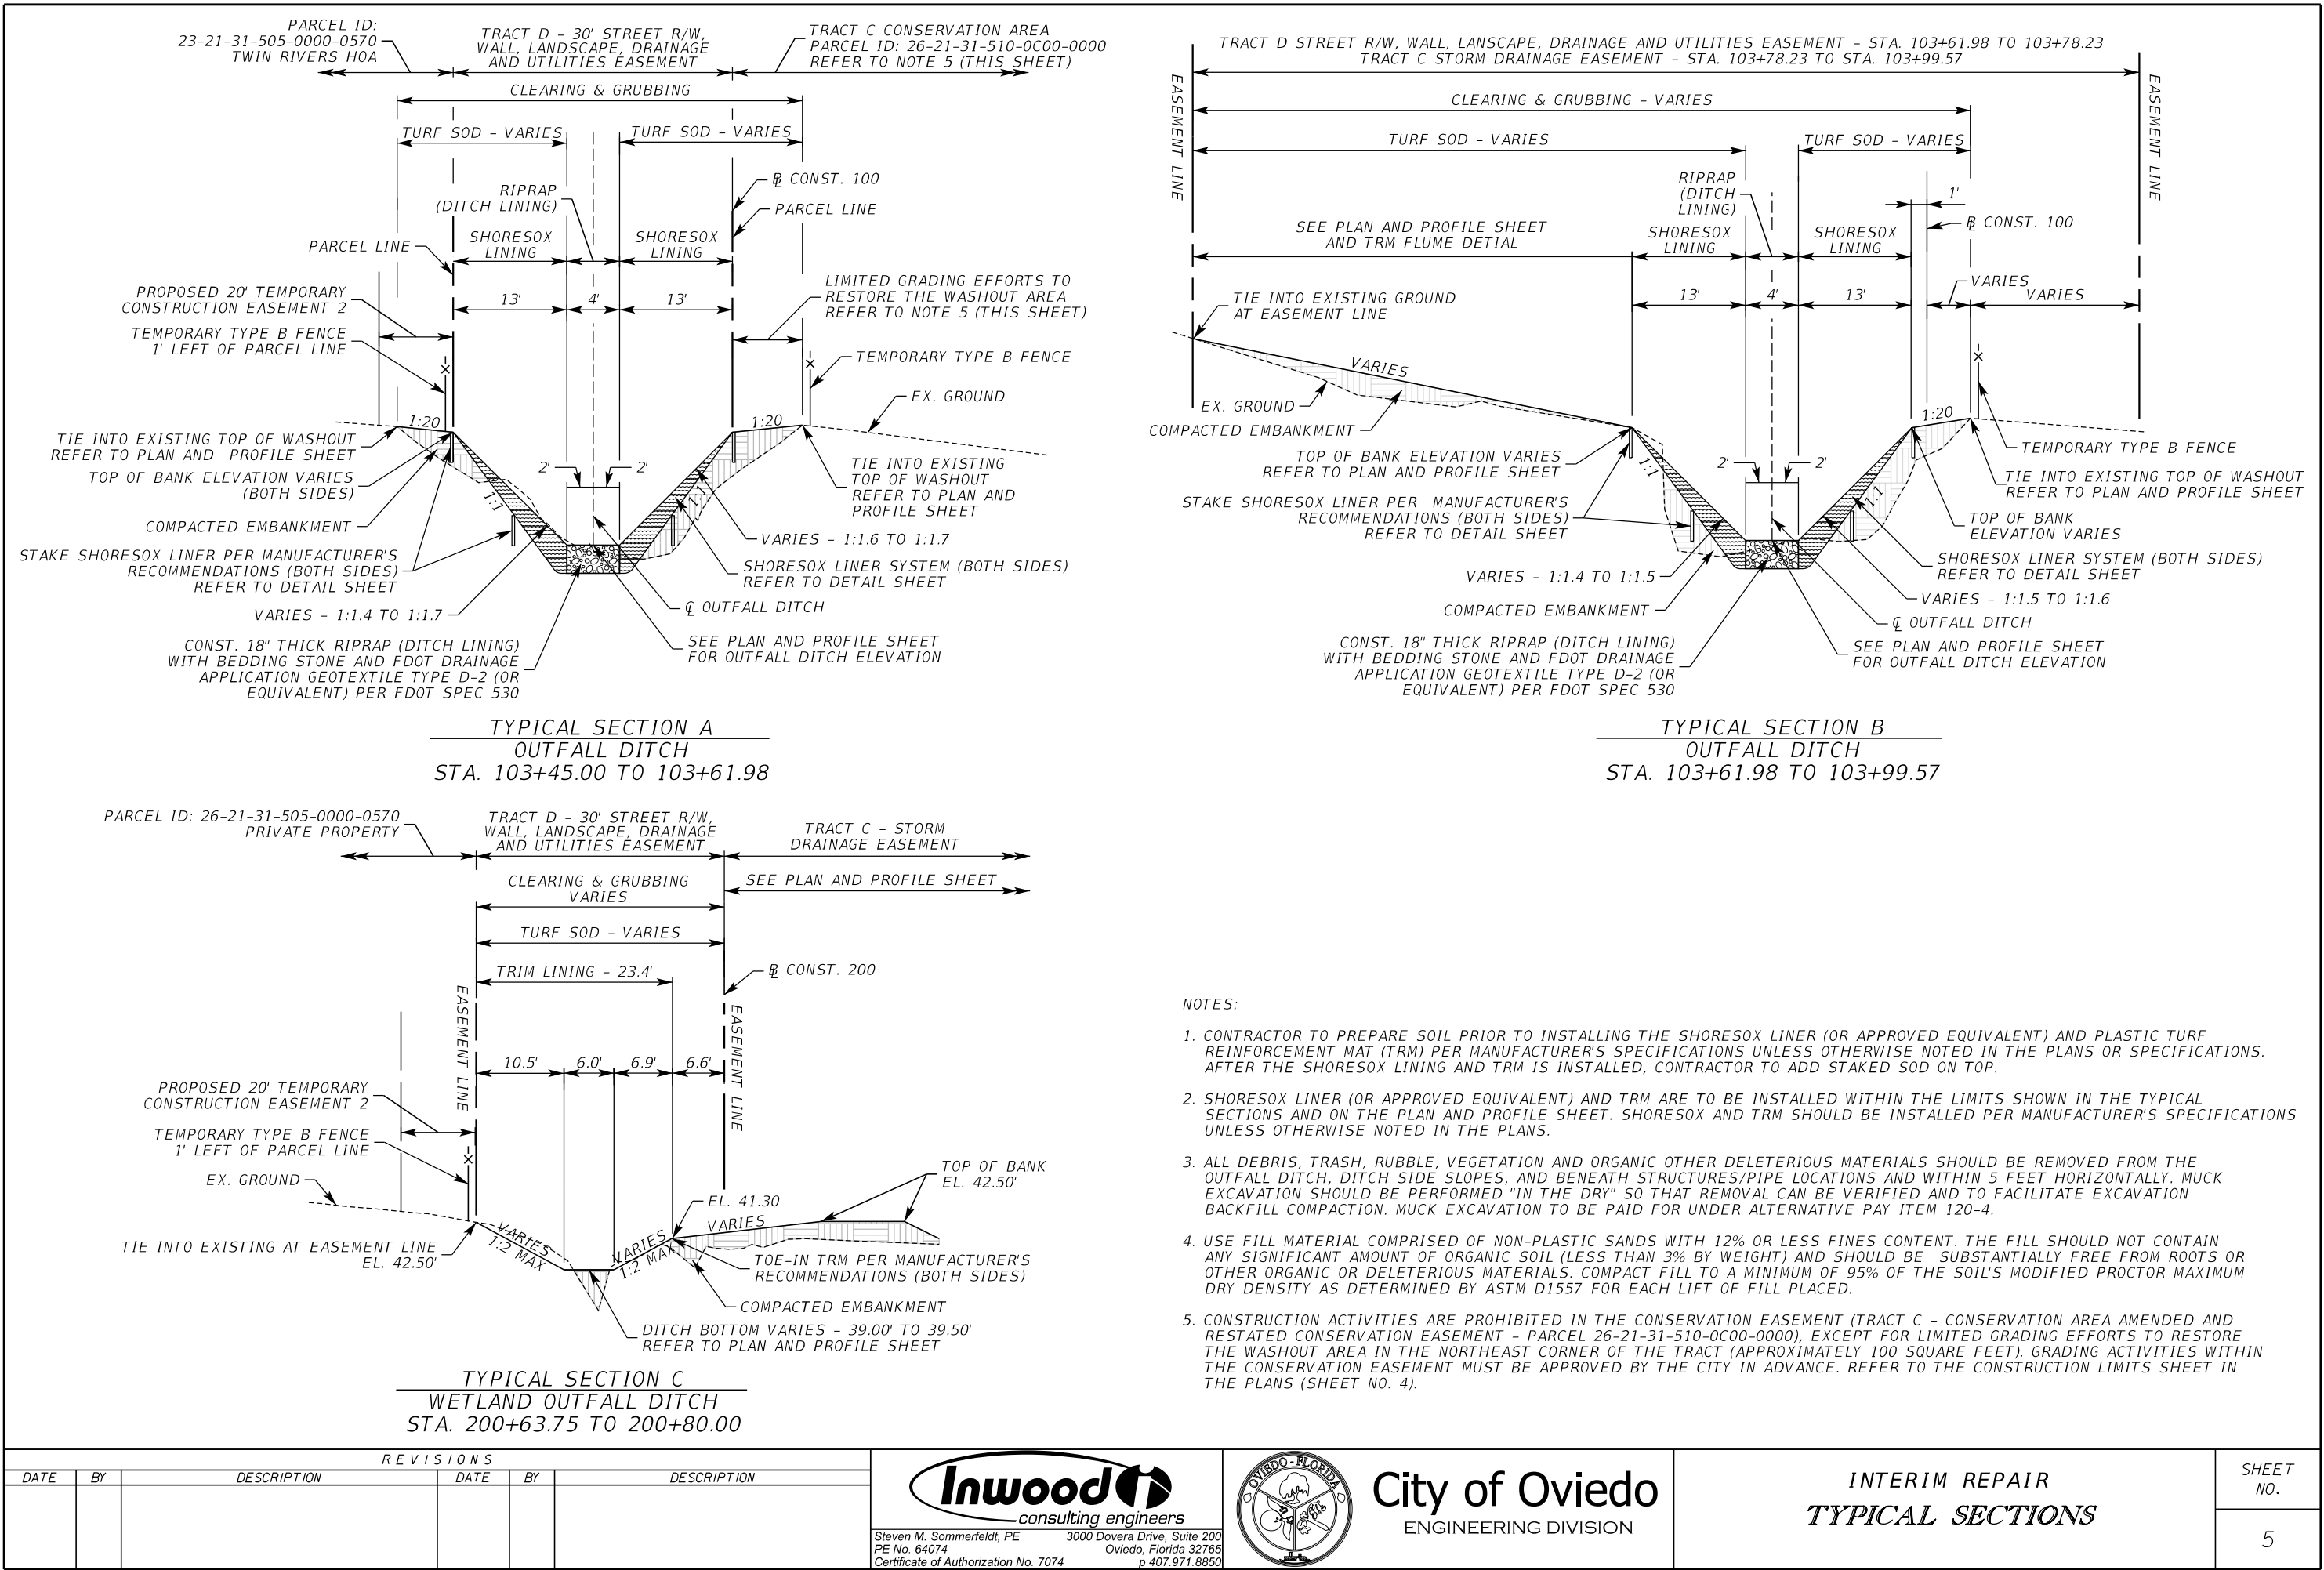

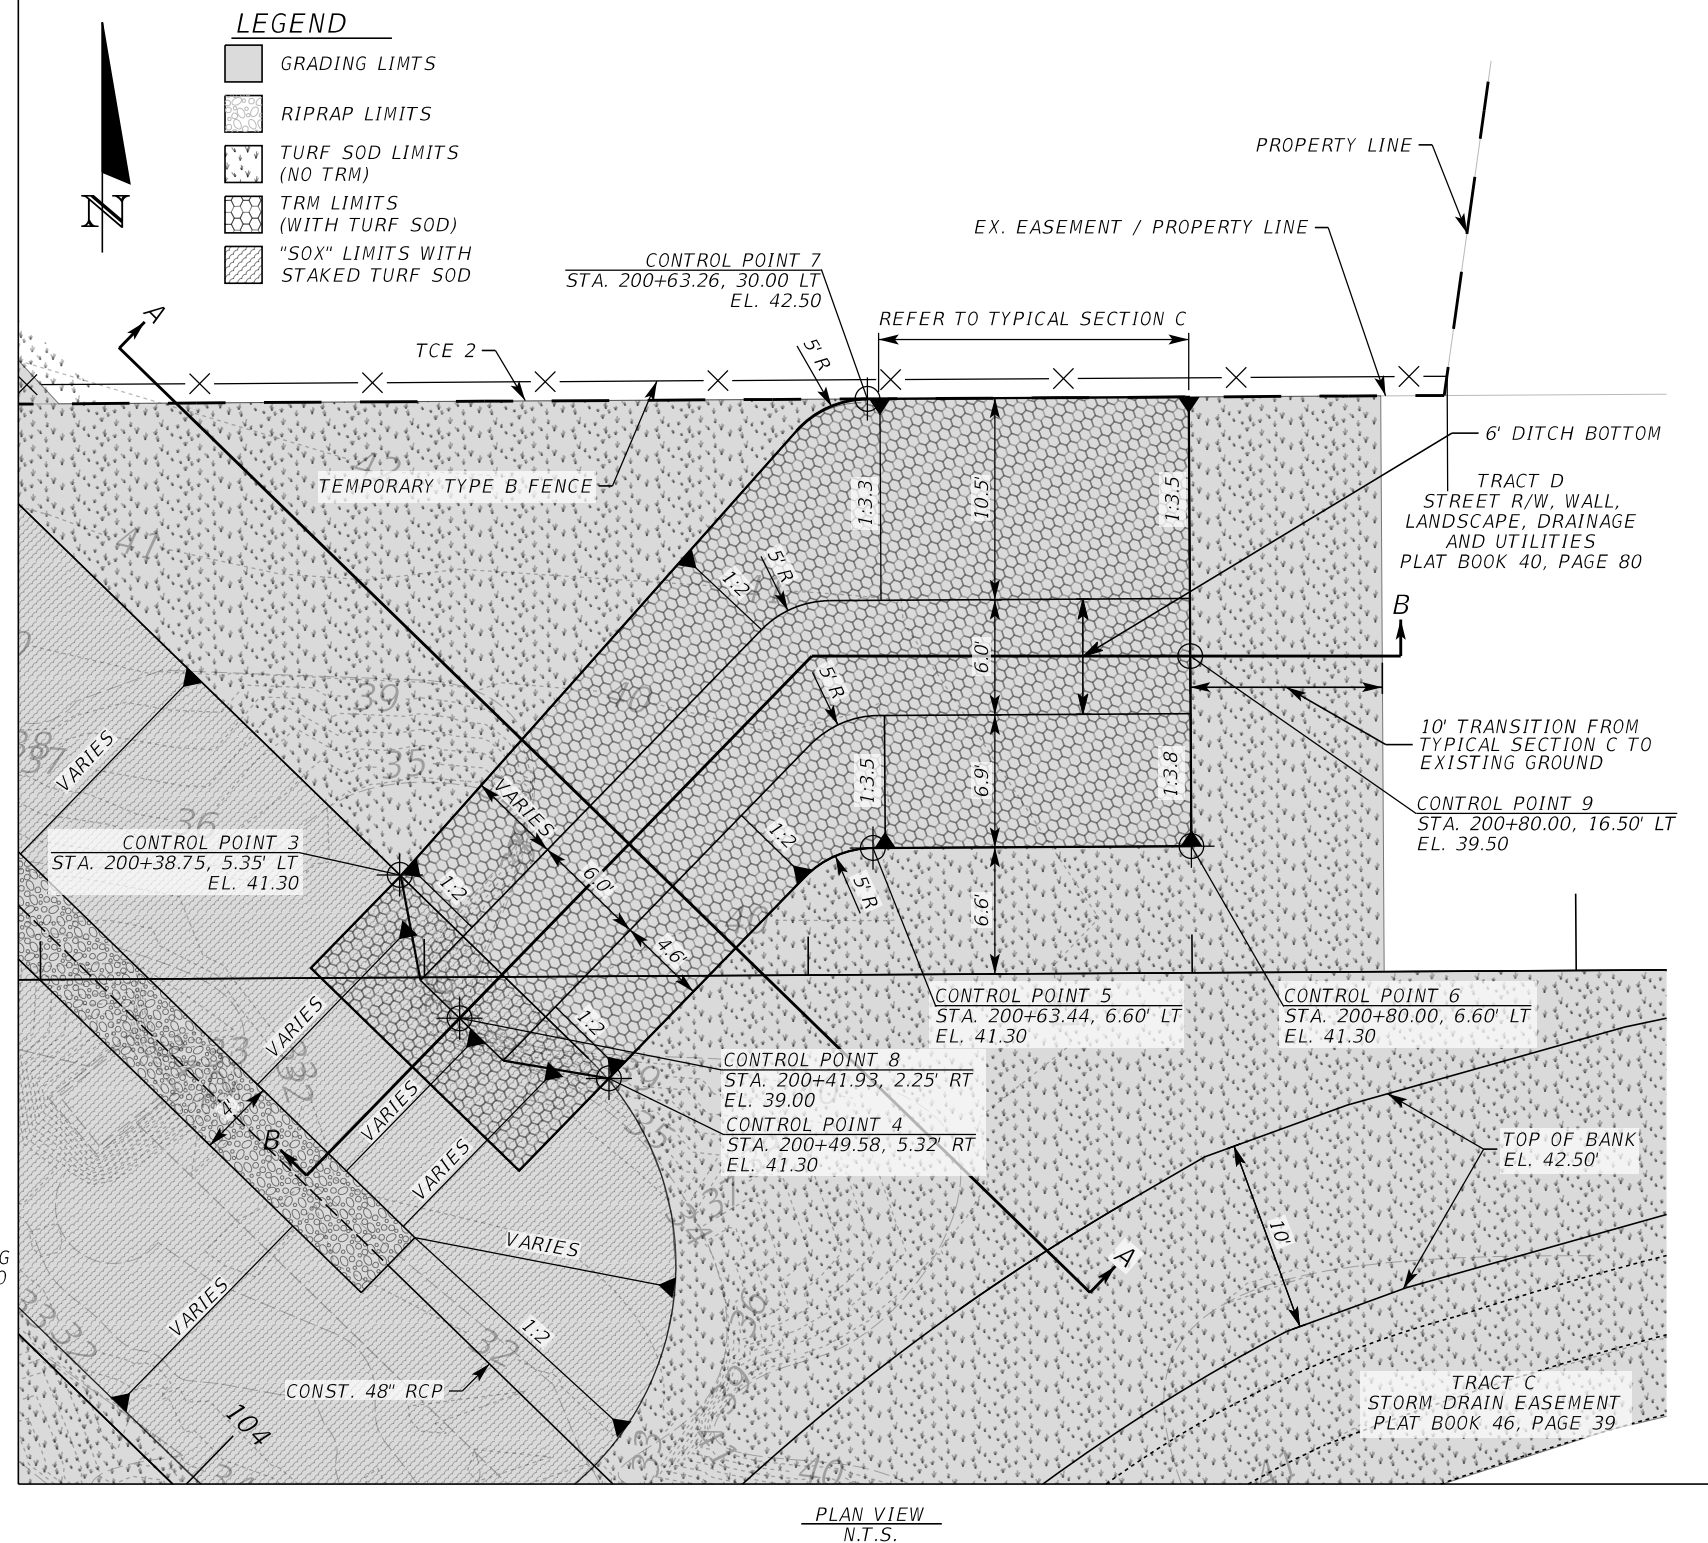

TRM FLUME DETAIL
N.T.S.

R E V I S I O N S					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION



City of Oviedo
ENGINEERING DIVISION

INTERIM REPAIR DETAIL SHEET

SHEET
NO.

9